



## TWO WAY GSM COMMUNICATOR

**RT-2WC-D31  
(WALL MOUNTED)**



**RT-2WC-D32  
(WALL MOUNTED HIGHPOWER)**



**RT-2WC-D33  
(CEILING MOUNTED)**



### COVERING SHEET

### REVISION HISTORY

REV NO.	DATE	NO. OF PAGES	PREPARED BY	REVIEWED BY	APPROVED BY
0	13.06.2017	03	GSB	RA	AX
1	24.06.2020	03	HH	CT	AX



## TWO WAY GSM COMMUNICATOR

### 1. APPLICATION:

Squadron 2way GSM communicator units are deployed in remote location like atm, banks, shops, home etc., to make a 2way communication from authenticated numbers only.


### 2. FEATURES:

- GSM based 2 way voice communication units with inbuilt speaker and microphone.
- 8 Ohms speaker.
- High sensitive microphone.
- User details storage capability.
- 0-85 temperature graded electronics components.
- Power 12VDC, 2A.
- Auto calls receiver capability.
- User authentication and security ensured.
- User Configuration through SMS.
- One ADMIN and maximum 10 numbers of users are allowed to call.
- Rejects call from unregistered users.
- Inbuilt Two Predefined Configurator mobile numbers.
- Standard SIM is preferable for this unit and it will be easy to use.
- SIM card Network 2G, 3G, 4G (VOLTE not supported).
- GSM 3dbi Patch antenna with 3 meter cable.

### 3. PRODUCT SELECTION:

Model	Descriptions	Dimension (W*H*D )mm
RT-2WC-D31	GSM SMS/ Calls. Wall mounted(Single hook)	85*113*77
RT-2WC-D32	GSM SMS/ Calls. Wall mounted high power(single hook)	270*250*230
RT-2WC-D33	GSM SMS/ Calls. Ceiling mount.	φ 160, H-98mm. φ 150mm (Cutout holes)
RT-PA12V2A	Power Adapter: 12VDC, 2A.	NA

### 4. DIMENSION:

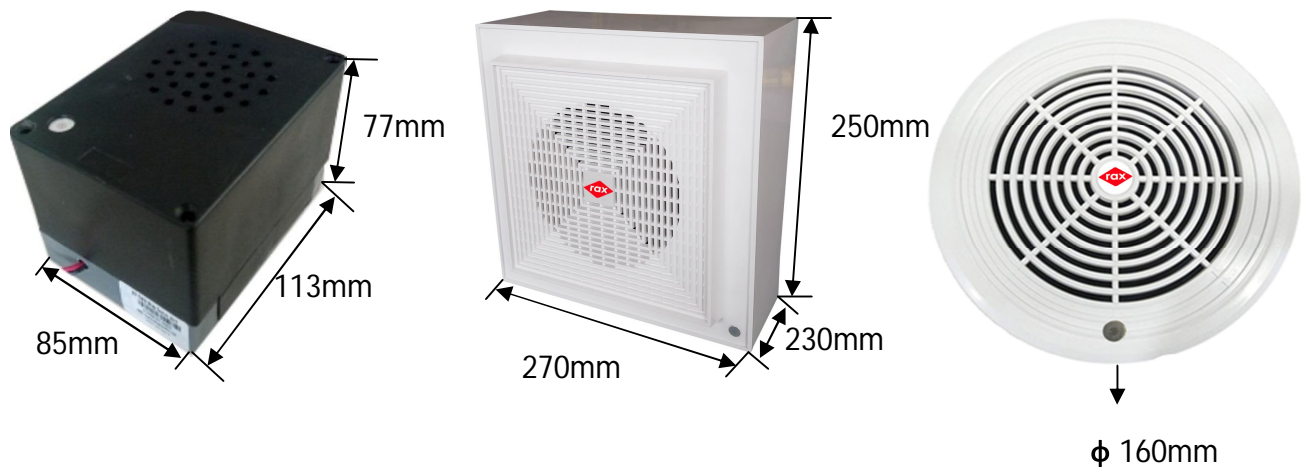

### 5. CALIBRATION:

This product is factory calibrated, no field calibration is necessary for the life of this product.

### 6. CERTIFICATION:

CE certified, RoHS compliant.

### 7. WARRANTY:

1 year warranty.

**Note:** Please refer our product catalogue for other models selection.